



Powerfoil®8 is a heavy-duty ceiling fan that provides exceptional comfort and year-round energy savings.

### ANYTHING BUT AVERAGE

- **Airfoils** — Eight patented aluminum airfoils (mill finish) with patent-pending AirFences
- **Winglets** — Powerfoil winglets eliminate wind noise (safety yellow)
- **Motor and Gearbox** — Industrial-grade motor and gearbox feature inline helical-cut gears for efficient, durable, and reliable operation; lubricated for life with synthetic oil
- **Hub System** — Machine-cut precision components for uniform load distribution
- **Controller** — Onboard NEMA 4X VFD eliminates RFI and EMI noise; wall-mounted keypad allows floor level control of all fan functions
- **Mounting Options** — Standard upper mount installs to I-beams and angle iron; optional kits allow for mounting to large I-beams, solid beams, Z-purlins, and pitched roofs
- **Safety Features** — Airfoil retainers, hub retainer clips, safety cables, Grade 8 bolts, fire relay (must be wired if required by local code)
- **Color Customization** — Choose from one of our 11 classic colors, or dream up a color of your own
- **Accessories** — SmartSense automatically adjusts fan speed. See the SmartSense spec sheet for details

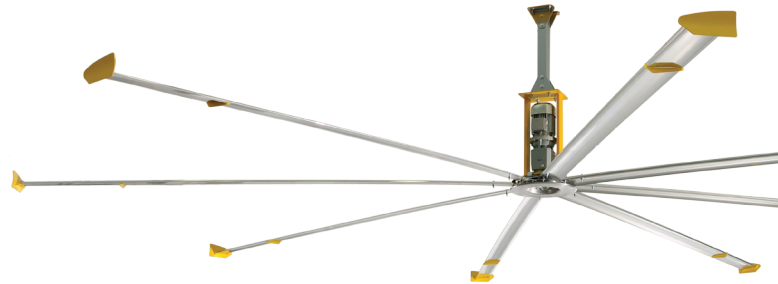

Onboard VFD



Aerodynamic Winglet Design


### Technical Specifications

Fan	Diameter (A)	Weight <sup>1</sup>	Max speed	Airfoil clearances <sup>2</sup>	Input power and required breaker	Motor horsepower	Sound at max speed <sup>3</sup>
PF8-08	8 ft (2.4 m)	135 lb (61 kg)	191 RPM	2 ft (0.6 m) on sides 4 ft (1.2 m) below ceiling	100–125 VAC, 50/60 Hz, 1 Φ, 15 A 200–240 VAC, 50/60 Hz, 1 Φ, 15 A 200–240 VAC, 50/60 Hz, 3 Φ, 10 A 400–480 VAC, 50/60 Hz, 3 Φ, 10 A 575–600 VAC, 50/60 Hz, 3 Φ, 10 A	1.0 hp (0.75 kW)	< 55 dBA
PF8-10	10 ft (3 m)	150 lb (68 kg)	148 RPM				
PF8-12	12 ft (3.6 m)	200 lb (91 kg)	135 RPM	2 ft (0.6 m) on sides	200–240 VAC, 50/60 Hz, 1 Φ, 25 A 200–240 VAC, 50/60 Hz, 3 Φ, 15 A	1.5 hp (1.1 kW)	
PF8-14	14 ft (4.3 m)	209 lb (95 kg)	109 RPM	5 ft (1.5 m) below ceiling			
PF8-16	16 ft (4.9 m)	224 lb (102 kg)	98 RPM	2 ft (0.6 m) on sides	400–480 VAC, 50/60 Hz, 3 Φ, 10 A 575–600 VAC, 50/60 Hz, 3 Φ, 10 A	2.0 hp (1.5 kW)	
PF8-18	18 ft (5.5 m)	233 lb (106 kg)	86 RPM	6 ft (1.8 m) below ceiling			
PF8-20	20 ft (6.1 m)	242 lb (110 kg)	76 RPM	2 ft (0.6 m) on sides			
PF8-24	24 ft (7.3 m)	261 lb (118 kg)	60 RPM	7 ft (2.1 m) below ceiling			


<sup>1</sup> Weight does not include mount or extension tube.

<sup>2</sup> Measure the distance from the tip of the winglet to the ceiling or major obstruction.

<sup>3</sup> Fans are sound tested at maximum speed in a laboratory environment. Actual results in field conditions may vary due to sound reflecting surfaces and environmental conditions.

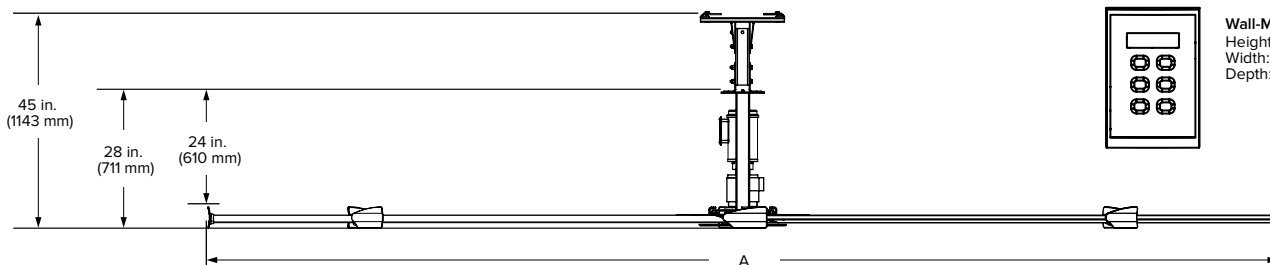

Pictured with 1-ft (305-mm) extension tube



**Wall-Mounted Keypad**  
Height: 3.4 in. (86.4 mm)  
Width: 2.2 in. (55.9 mm)  
Depth: 0.72 in. (18.3 mm)



Certified to UL 507 and CSA C22.2

Lead times may vary.  
See full warranty for coverage information.  
Specifications subject to change without notice.



AMERICAS  
BIGASSOLUTIONS.COM  
877-244-3267

CANADA  
BIGASSOLUTIONS.COM/CA  
844-924-4277

AUSTRALIA  
BIGASSOLUTIONS.COM/AU  
1-300-244-277

HONG KONG  
BIGASSOLUTIONS.COM/HK  
+852 2836 5808

SINGAPORE  
BIGASSOLUTIONS.COM/SG  
+65 6709 8500

MALAYSIA  
+603 5565 0888

Powerfoil®8 Plus is a heavy-duty ceiling fan that provides exceptional comfort and year-round energy savings.

### ANYTHING BUT AVERAGE

- **Airfoils** — Eight patented Powerfoil hybrid airfoils (mill finish) with patent-pending AirFences
- **Winglets** — PowerfoilPlus winglets eliminate wind noise (safety yellow)
- **Motor and Gearbox** — Industrial-grade motor and gearbox feature inline helical-cut gears for efficient, durable, and reliable operation; lubricated for life with synthetic oil
- **Hub System** — Machine-cut precision components for uniform load distribution
- **Controller** — Onboard NEMA 4X VFD eliminates RFI and EMI noise; wall-mounted keypad allows floor level control of all fan functions
- **Mounting Options** — Standard upper mount installs to I-beams and angle iron; optional kits allow for mounting to large I-beams, solid beams, Z-purlins, and pitched roofs
- **Safety Features** — Airfoil retainers, hub retainer clips, safety cables, Grade 8 bolts, fire relay (must be wired when required by local code)
- **Color Customization** — Choose from one of our 11 classic colors, or dream up a color of your own
- **Accessories** — SmartSense automatically adjusts fan speed. See the SmartSense spec sheet for details.



Onboard VFD



Powerfoil Plus Winglet


### Technical Specifications

Fan	Diameter (A)	Weight <sup>1</sup>	Max speed	Airfoil clearances <sup>2</sup>	Input power and required breaker	Motor horsepower	Sound at max speed <sup>3</sup>
PP8-10	12 ft (3.7 m)	194 lb (88 kg)	135 RPM	2 ft (0.6 m) on sides 4 ft (1.2 m) below ceiling	200–240 VAC, 50/60 Hz, 1 Φ, 25 A 200–240 VAC, 50/60 Hz, 3 Φ, 15 A 400–480 VAC, 50/60 Hz, 3 Φ, 10 A 575–600 VAC, 50/60 Hz, 3 Φ, 10 A	1.5 hp (1.1 kW)	< 55 dBA
PP8-12	14 ft (4.3 m)	204 lb (93 kg)	109 RPM	2 ft (0.6 m) on sides	200–240 VAC, 50/60 Hz, 1 Φ, 25 A 200–240 VAC, 50/60 Hz, 3 Φ, 15 A 400–480 VAC, 50/60 Hz, 3 Φ, 10 A 575–600 VAC, 50/60 Hz, 3 Φ, 10 A	2.0 hp (1.5 kW)	
PP8-14	16 ft (4.9 m)	219 lb (99 kg)	98 RPM	5 ft (1.5 m) below ceiling			
PP8-16	18 ft (5.5 m)	228 lb (103 kg)	86 RPM	2 ft (0.6 m) on sides			
PP8-18	20 ft (6.1 m)	237 lb (108 kg)	76 RPM	6 ft (1.8 m) below ceiling			
PP8-20	22 ft (6.7 m)	247 lb (112 kg)	68 RPM	2 ft (0.6 m) on sides			
PP8-24	24 ft (7.3 m)	256 lb (116 kg)	60 RPM	7 ft (2.1 m) below ceiling			

<sup>1</sup> Weight does not include mount or extension tube.

<sup>2</sup> Measure the distance from the tip of the winglet to the ceiling or major obstruction.

<sup>3</sup> Fans are sound tested at maximum speed in a laboratory environment. Actual results in field conditions may vary due to sound reflecting surfaces and environmental conditions.

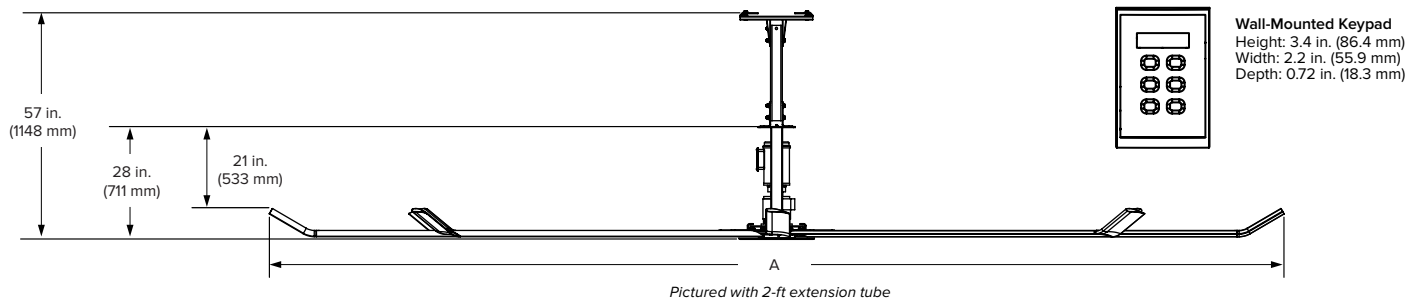

Lead times may vary.  
See full warranty for coverage information.  
Specifications subject to change without notice.



Intertek  
Certified to UL 507 and CSA C22.2



AMERICAS  
BIGASSOLUTIONS.COM  
877-244-3267

CANADA  
BIGASSOLUTIONS.COM/CA  
844-924-4277

AUSTRALIA  
BIGASSOLUTIONS.COM/AU  
1-300-244-277

HONG KONG  
BIGASSOLUTIONS.COM/HK  
+852 2836 5808

SINGAPORE  
BIGASSOLUTIONS.COM/SG  
+65 6709 8500

MALAYSIA  
+603 5565 0888